


Cool Caddie Procedure for Changing Oil


Remove back cover.

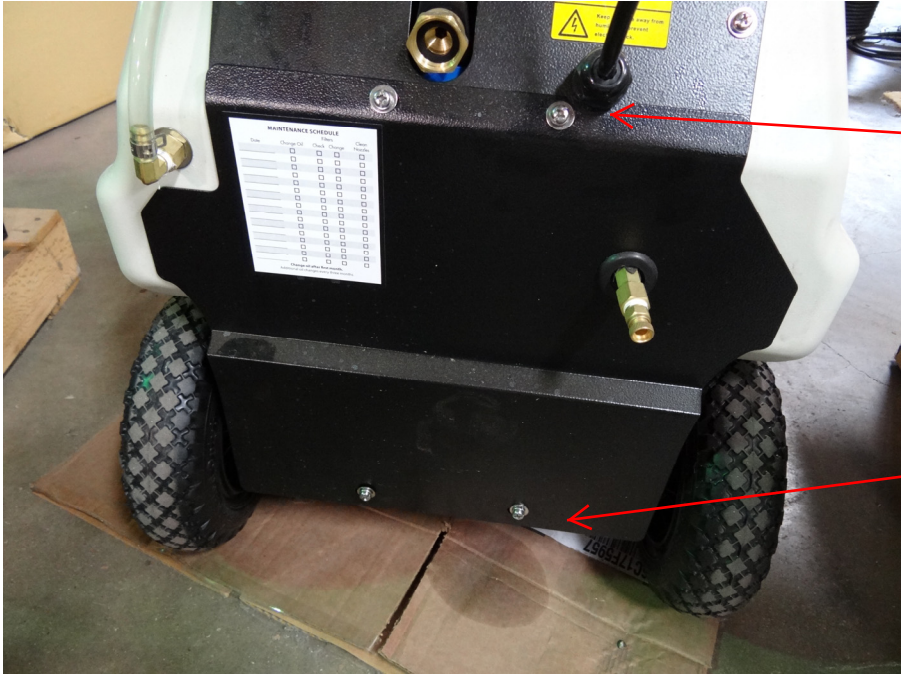

2 Top Screws

2 Bottom Screws


Place oil catch pan in appropriate position.

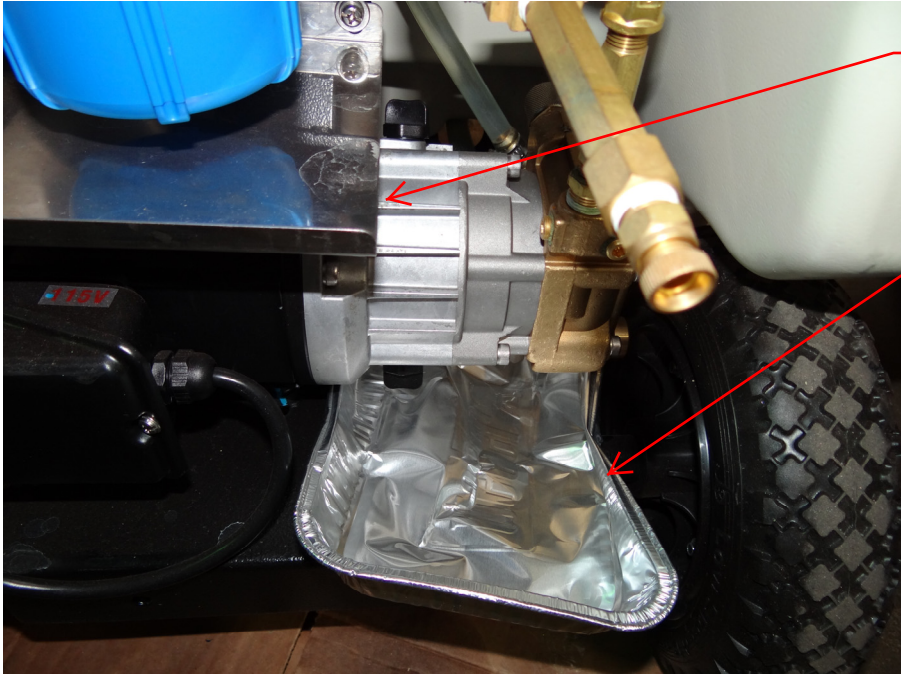

CAUTION: Sharp Edge


Aluminum pan

Unscrew fill cap, recommend using 20mm wrench.

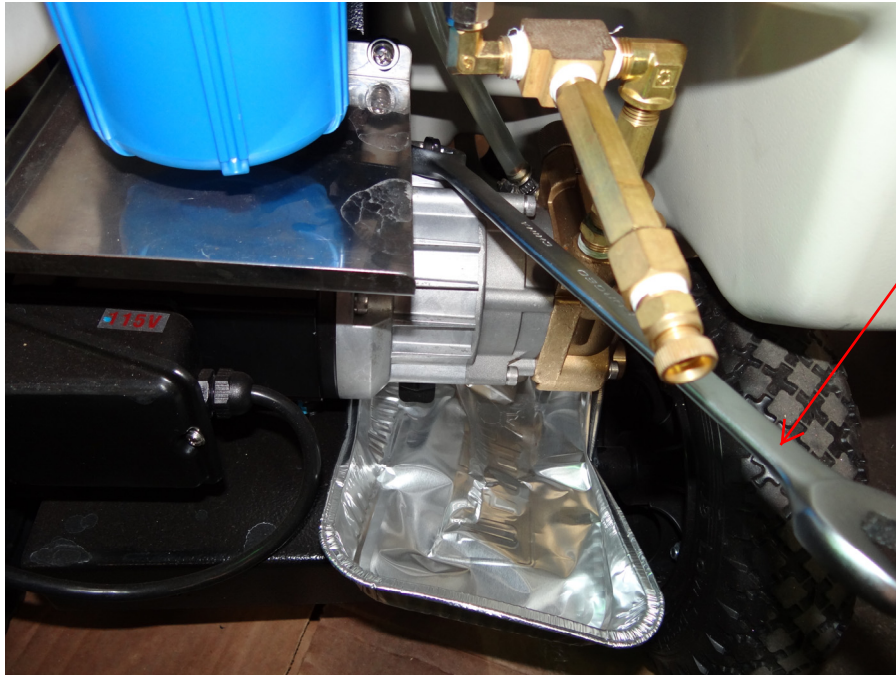


20mm Wrench


Unscrew drain cap and allow oil to drain.

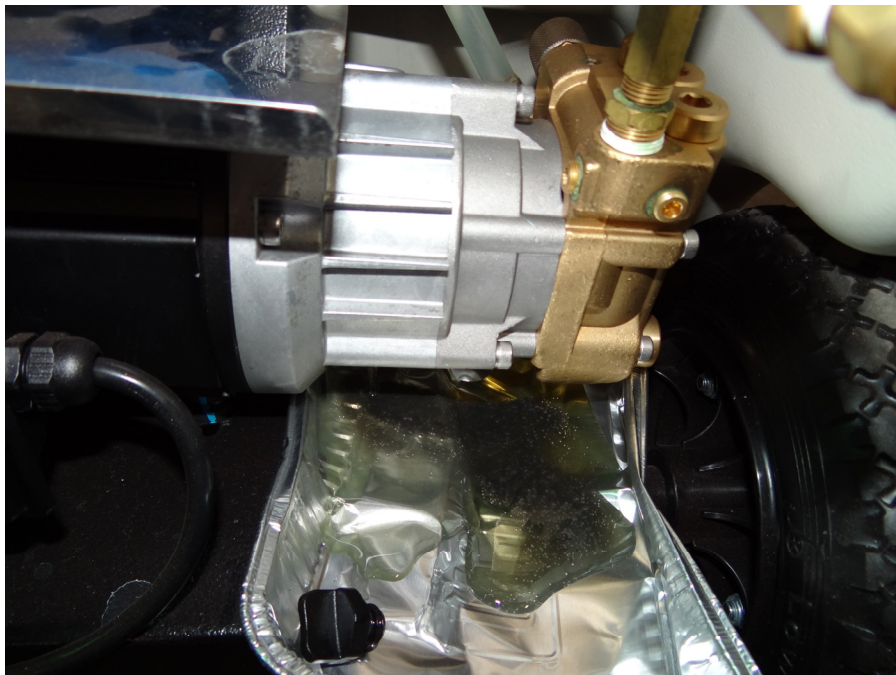

Remove oil pan, and attach drain plug.

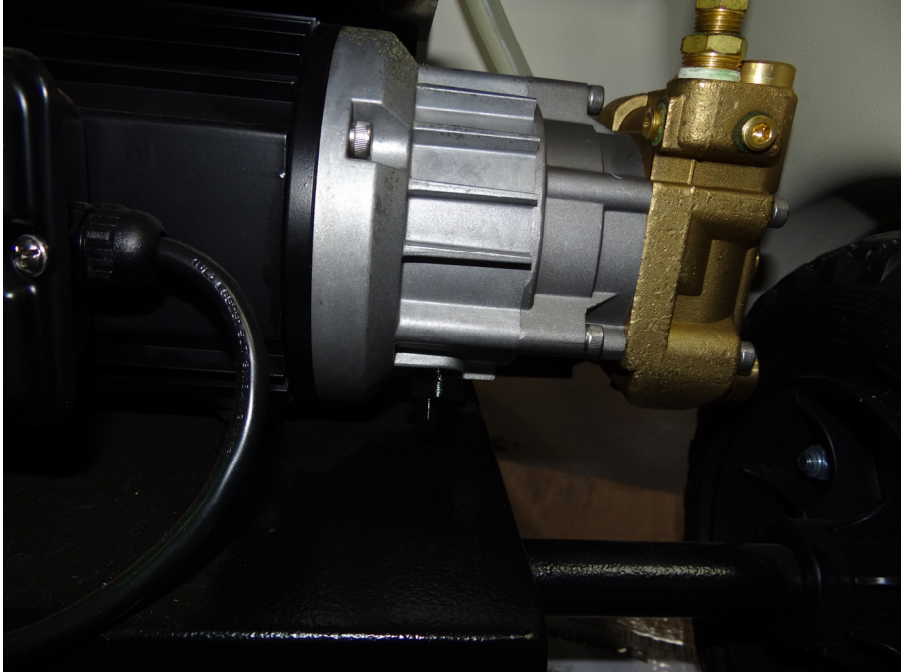


Use funnel for filling oil.

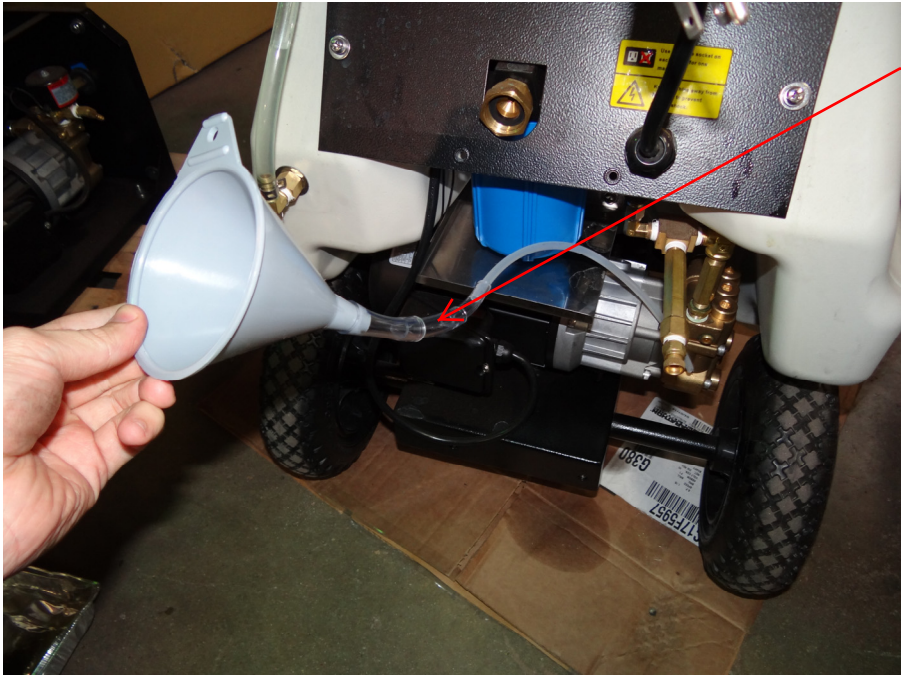


Funnel and Tubing

Align tube so oil will fill correctly.

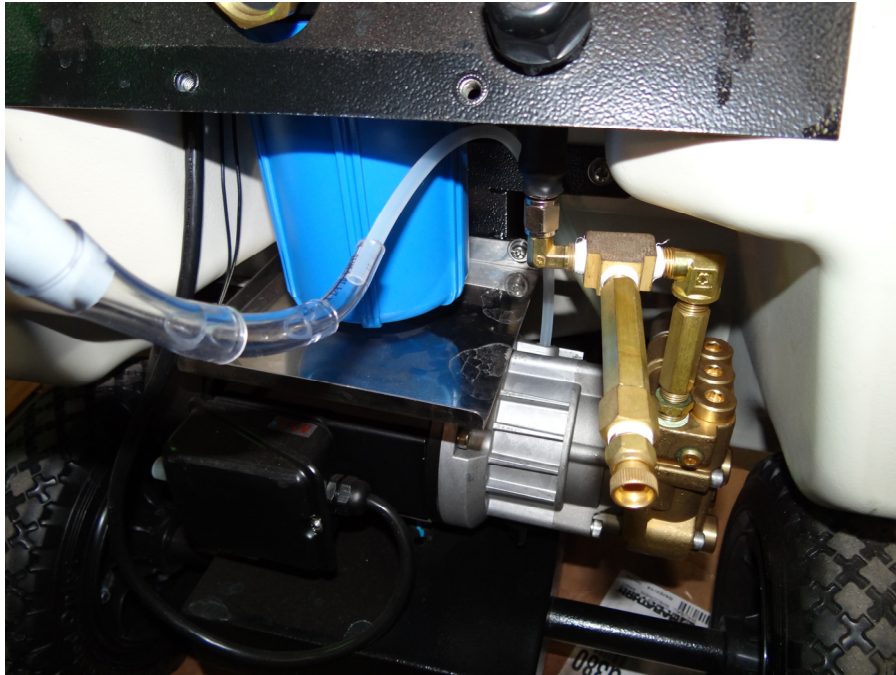


Pour oil into funnel until pump is full of oil.

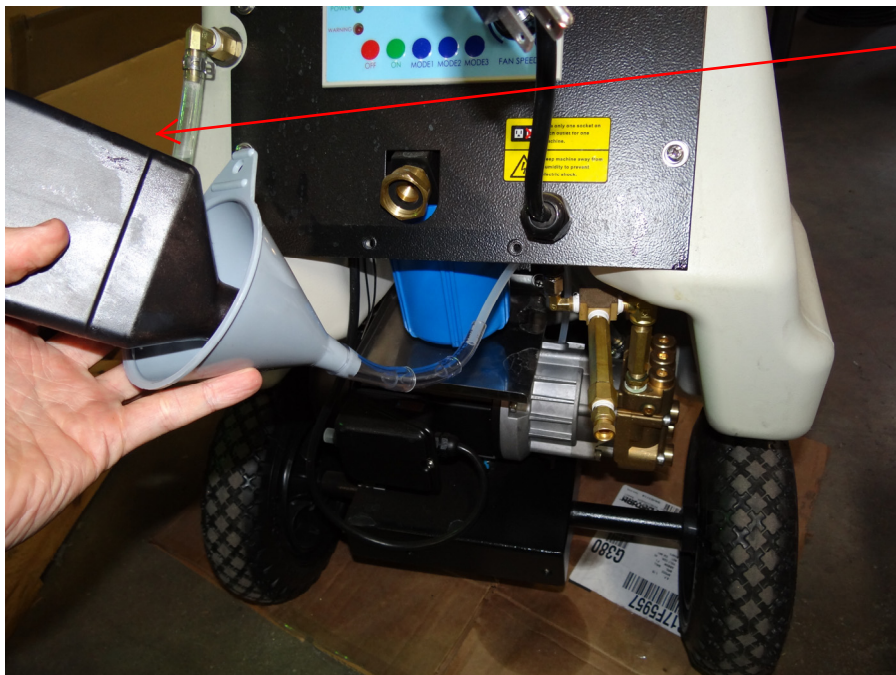


Oil Part #F02-06-001


An alternate method for filling oil is to use a squeeze bottle.

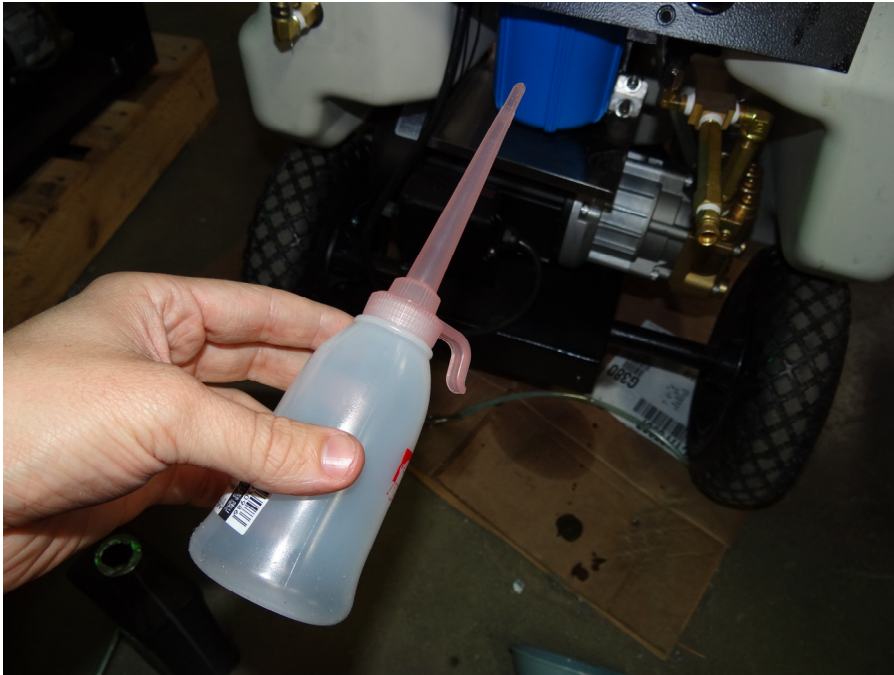

Squeeze oil from container into the pump until it is full.

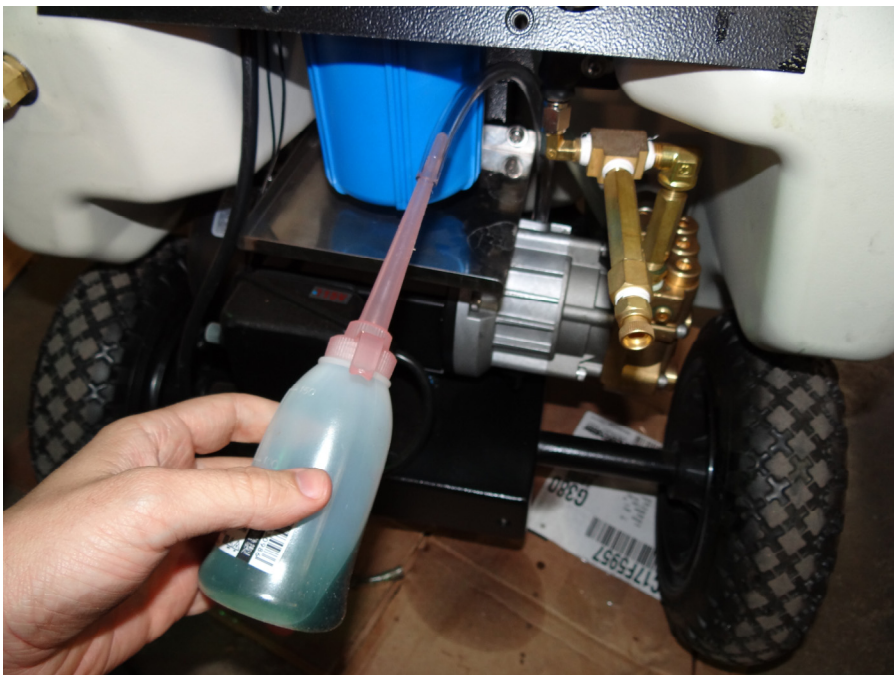

After the pump is full of new oil, reattach the fill cap.

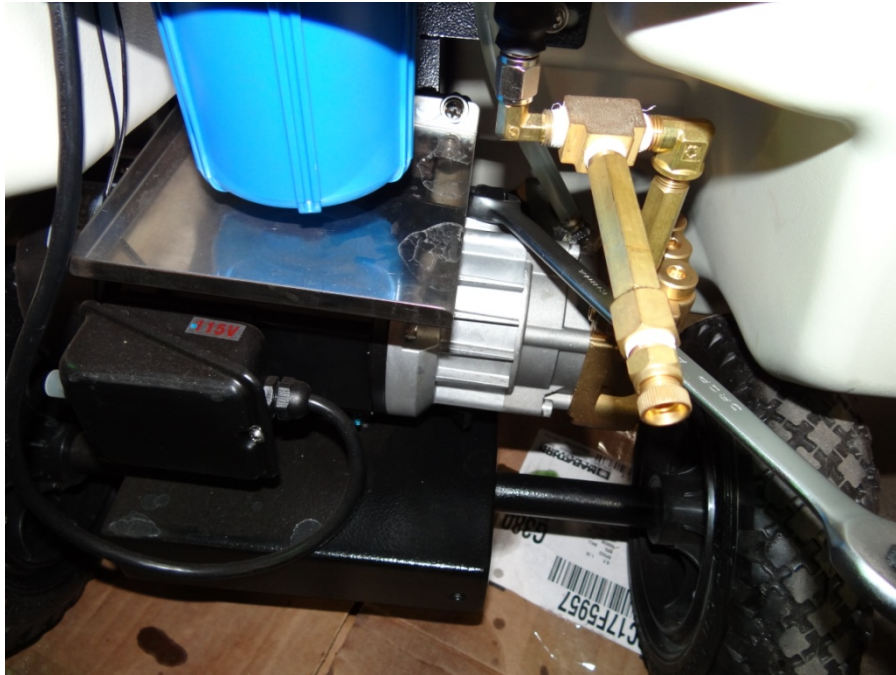

Reattach back panel and dispose of oil properly. One solution is to pour used oil into an empty container before disposing as shown below.



Dispose of used oil